

PLACE 6-4" DIA. STEEL
POLES 60" ABOVE GRADE
CAP OR GROUT FULL. PAINT
TO MATCH WALL COLOR.

GROUT
CELLS FULL

#4 DOWELS
@ 24" O.C.

CLASS "B"
CONCRETE

2-#4
BARS
CONT.

OR
ALTERNATE
FOOTING

SECTION A-A

OR
ALTERNATE
FOOTING

SLOPE TO
DRAIN (TYP)


2-#4
BARS
CONT.

CLASS "B"
CONCRETE

APPROACH SLAB
THICKENED EDGE DETAIL

12'-0" x 21'-6" x 6"
THICK CONCRETE APPROACH
SLAB WITH THICKENED
EDGES, CLASS "B" CONC.
W/ 6" x 6", 1.4 x 1.4
WWF, ON COMPACTED
SUBGRADE. APPROACH SLAB
SHALL HAVE A CONSTANT
SLOPE WHICH MATCHES
THE ENCLOSURES SLAB.

8" CMU OR BLOCK OR STUCCO
TO MATCH BUILDING

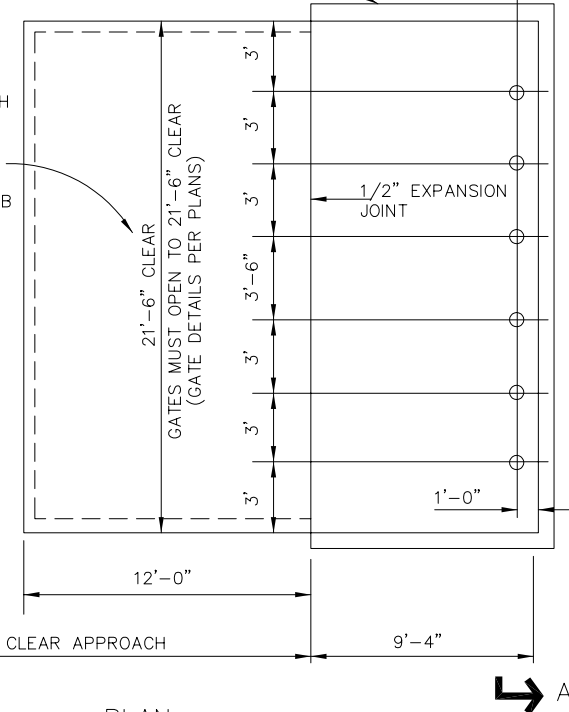

NOTE:

1. DOUBLE ENCLOSURE FOR ANGLE PICK-UP
SIMILAR TO COS DET. 2146-1
2. 1/2" EXPANSION JOINT, ASTM D-1751
PER MAG SECTION 729.

DETAIL NO.
G-3164-1


CITY OF GOODYEAR
STANDARD DETAIL

APPROVED BY:
Goodyear Standards and
Policies Committee


7/97

DOUBLE REFUSE ENCLOSURE


DETAIL NO.
G-3164-1

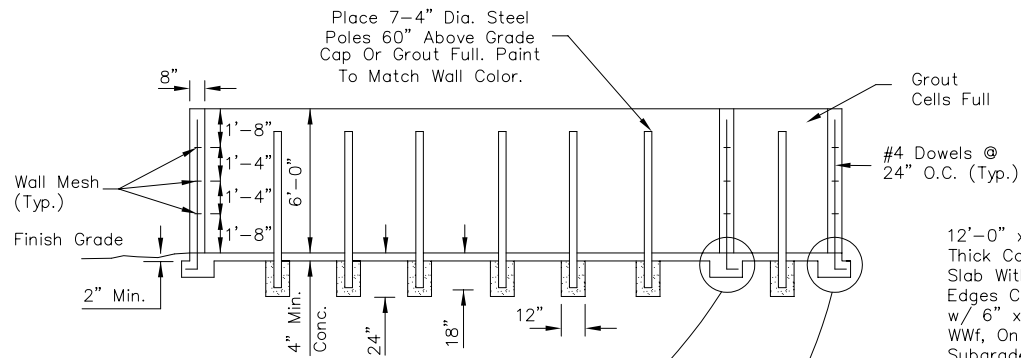

SECTION A-A

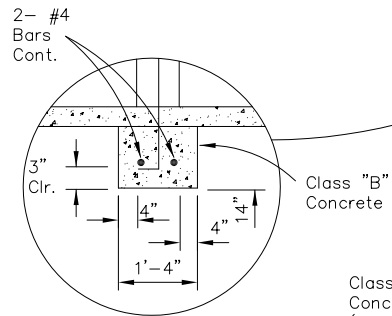


APPROACH SLAB
THICKENED EDGE DETAIL

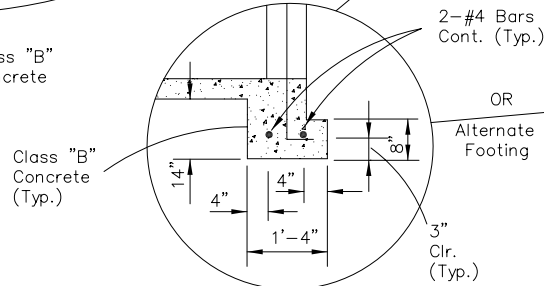

NOTES:

1. Double Enclosure For Angle Pick-Up Similar To COS Det. 2146-1
2. 1/2" Expansion Joint, ASTM D-1751 Per MAG Section 729.

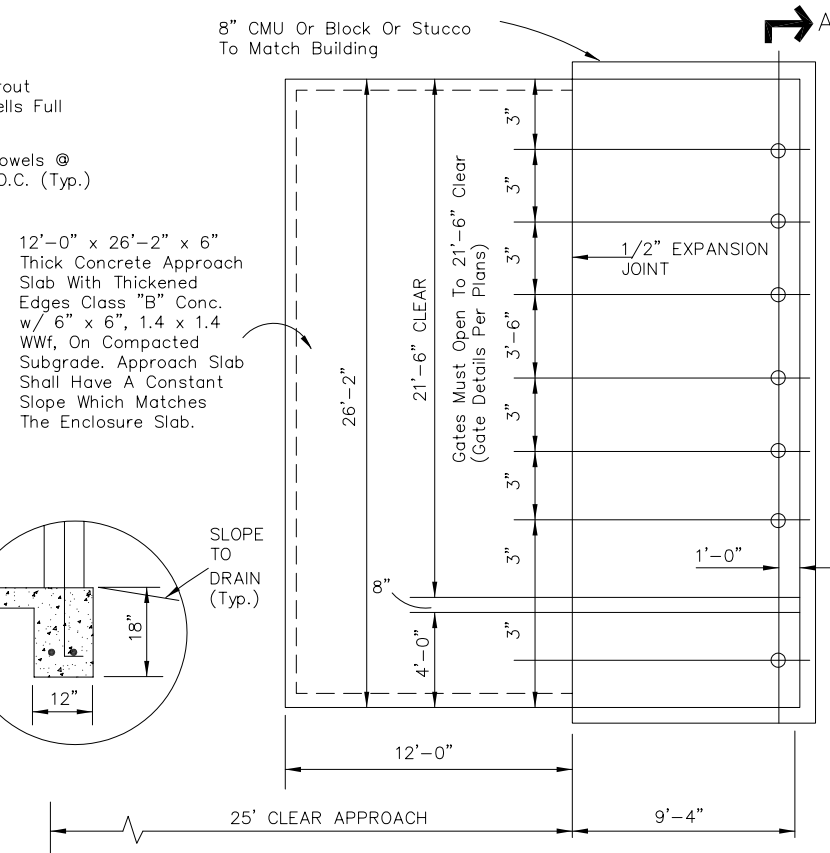

PLAN

DETAIL NO.
G-3164-2

CITY OF GOODYEAR
STANDARD DETAIL

APPROVED BY:
Goodyear Standards and
Policies Committee 7/97

DOUBLE REFUSE ENCLOSURE
W/ GREASE CONTAINMENT AREA

DETAIL NO.
G-3164-2